




# Brother PT-1290 Keyboard Replacement

Use this guide to show you how to replace keyboard to the Brother Label Maker PT-1290.

Written By: Angela Araujo

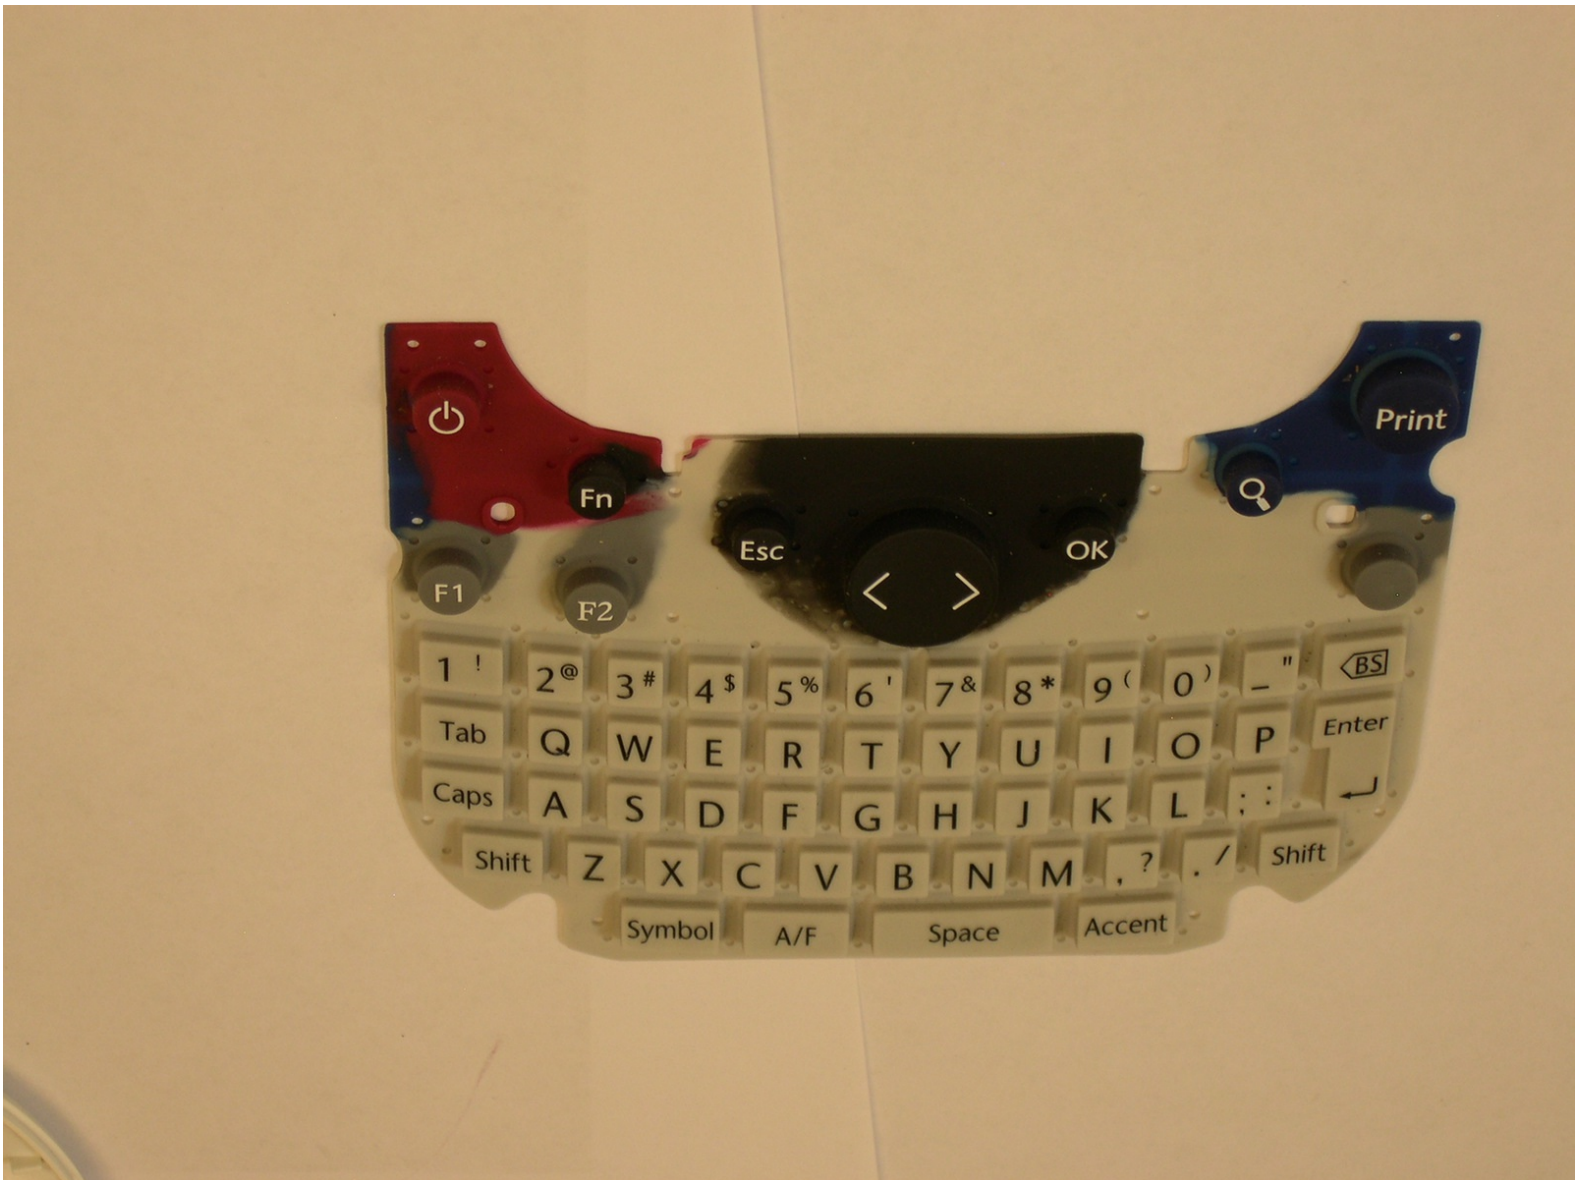

## INTRODUCTION



This guide will take you through the broken/damaged keyboard to the P-Touch step by step.

---

### TOOLS:




- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Turn over device to remove batteries.

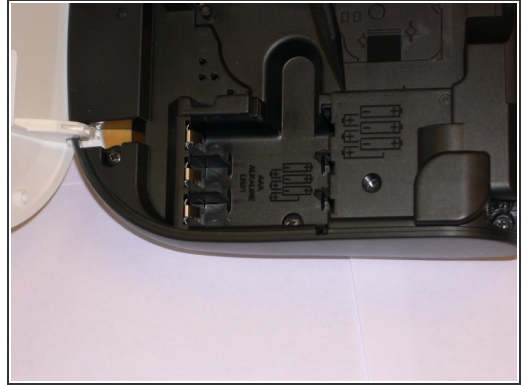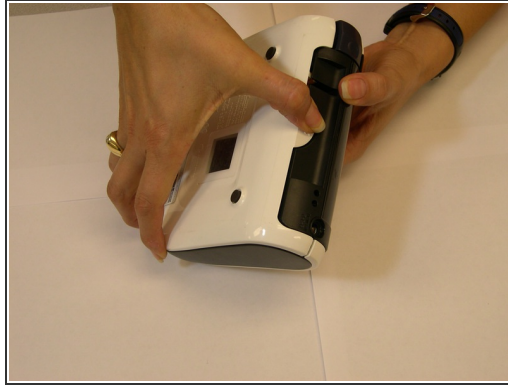

- Turn the device to it's side toward the bottom of the keyboard. Then pop open the case and remove the batteries.




## Step 2 — Back of device

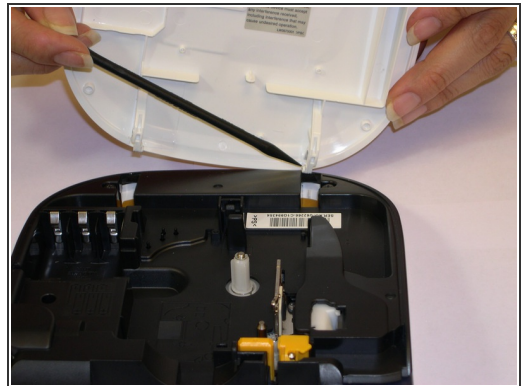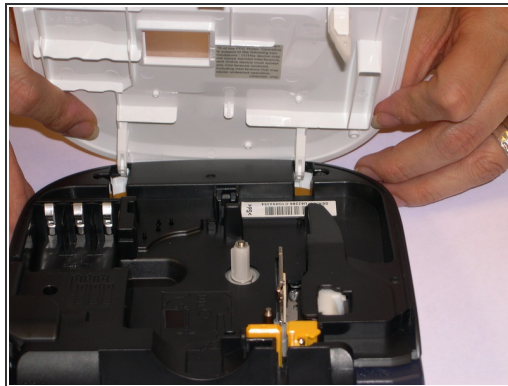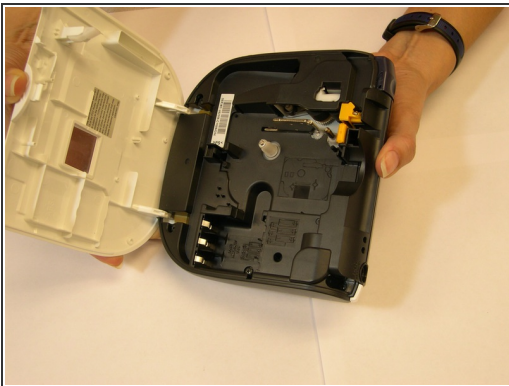

- Remove back of device and set aside.





### Step 3 — Remove screws

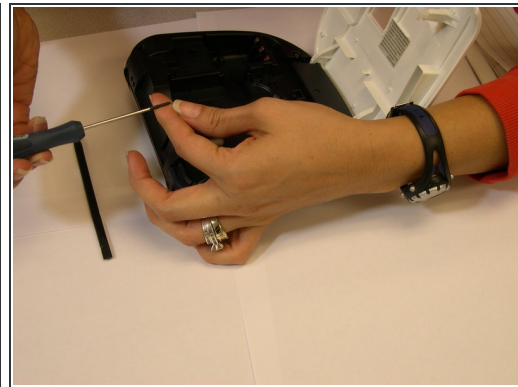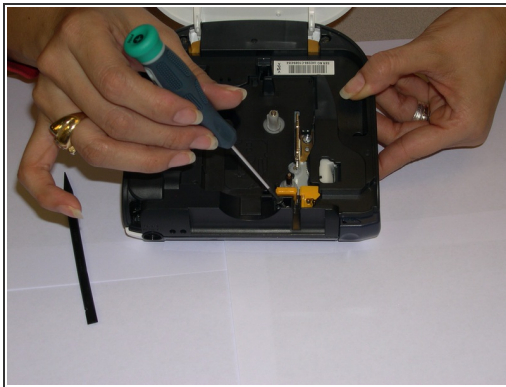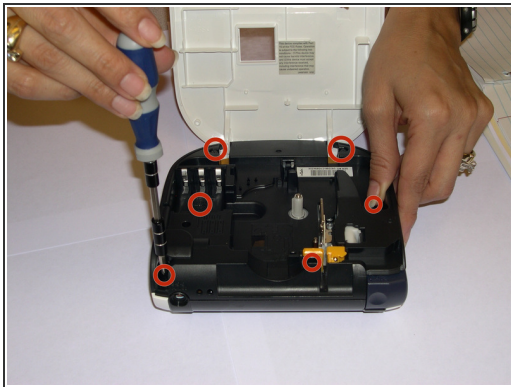




- Remove all 1/4 inch screws(6 total) with a (+PH00) screwdriver. Open slowly not to damage the display data cable.

### Step 4 — Remove flat panel

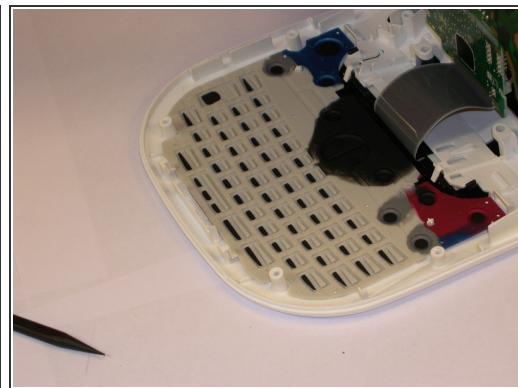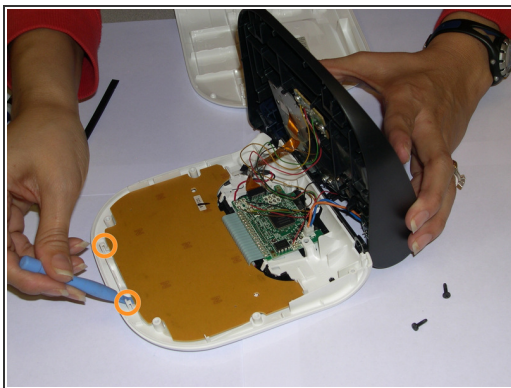

- Use a plastic opening tool to remove the flat-panel membrane keyboard. Lift up and set aside.

## Step 5 — Remove

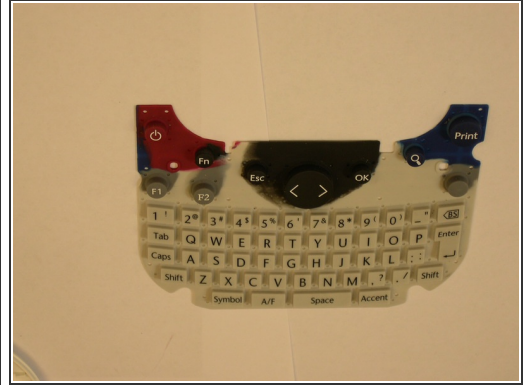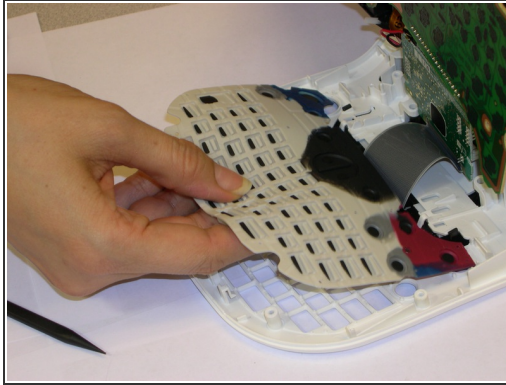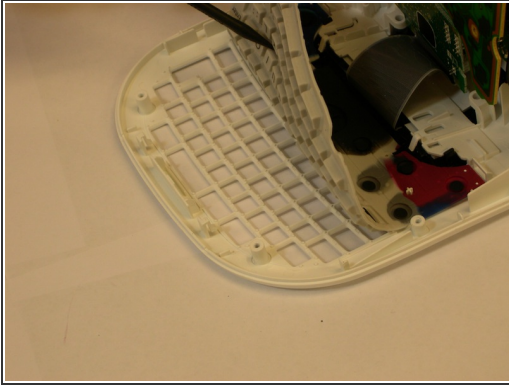

- Use a spudger to aid in removing the keyboard.
- Gently lift out while removing the LCD screen that is connected to the data cable and finishing removing.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-16 04:52:15 PM.